

INSTALLATION MANUAL

Car Model: Audi A6 2019+



Installation Requirement Safety Precautions

1. For your safety and normal using, please ask a professional personal to install it, do not install and uninstall by yourself, to avoid product damage or accidents.

2. Before installation, please make sure car mfd showing normally, all buttons inside car are working correctly, check if car light working, if have some scratches inside car surface, if yes, please contact with car owner.


3. Check if tailgate open and close normally, if has any deformations.

4. Prepare all tools, turn off car, ensure power off operation.

5.The parts and screws of the original car removed during installation should be placed separately and marked to prevent loss. Wire joints should be insulated to prevent short circuit.

6.According to the wiring mode of our company, avoid affecting the moving parts of the car when installation, such as steering wheel drive shaft, accelerator and brake pedal and other vehicle control parts. The wiring harness should be fixed during the straight line process to prevent loose.

7.Do not plug in or out the product and plug in the power-on state, to avoid damage to the product.

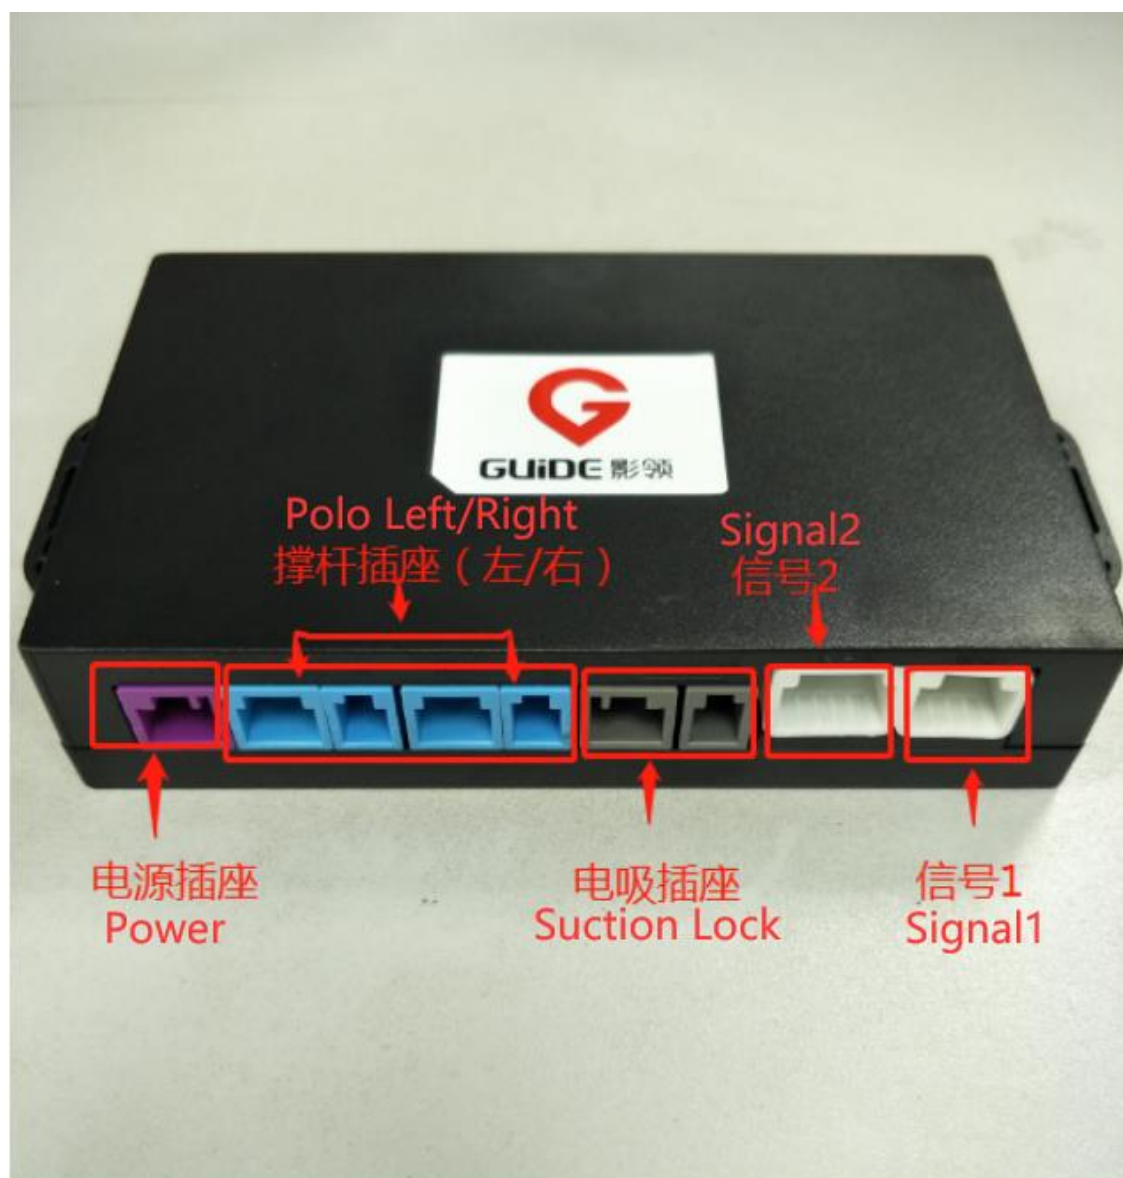



Remove tailgate manual switch fixed screw.



Remove this 3 plastic frames.



Remove left and right decorative rubber shell



Take off original tailgate cover frame.



Take off original bottom decorative frame.



Take off original decorative plastic frame.



Take off left and right plastic frame, please note unplug light connector.



Take off left and right springs.



Install this holder with hand hilt at this position.



把带手柄的支架伸入图中位置

Install ball holder screw and fixed screw.



Fix another holder.




靠内里的支架


Install another holder at this position, use screw to fix.




Install our electric pole.

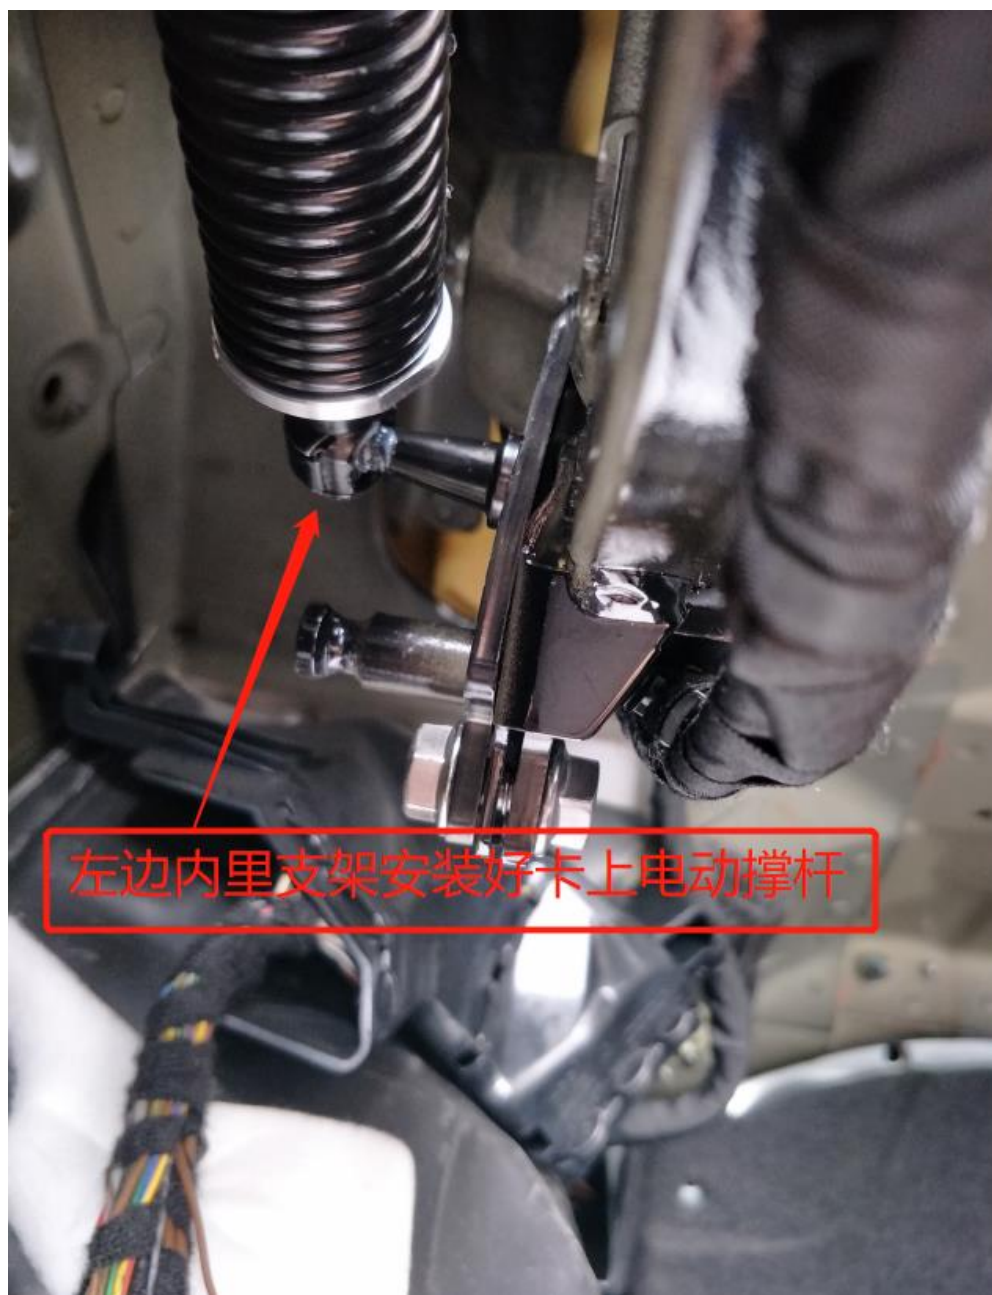


Install left electric pole like this photo.

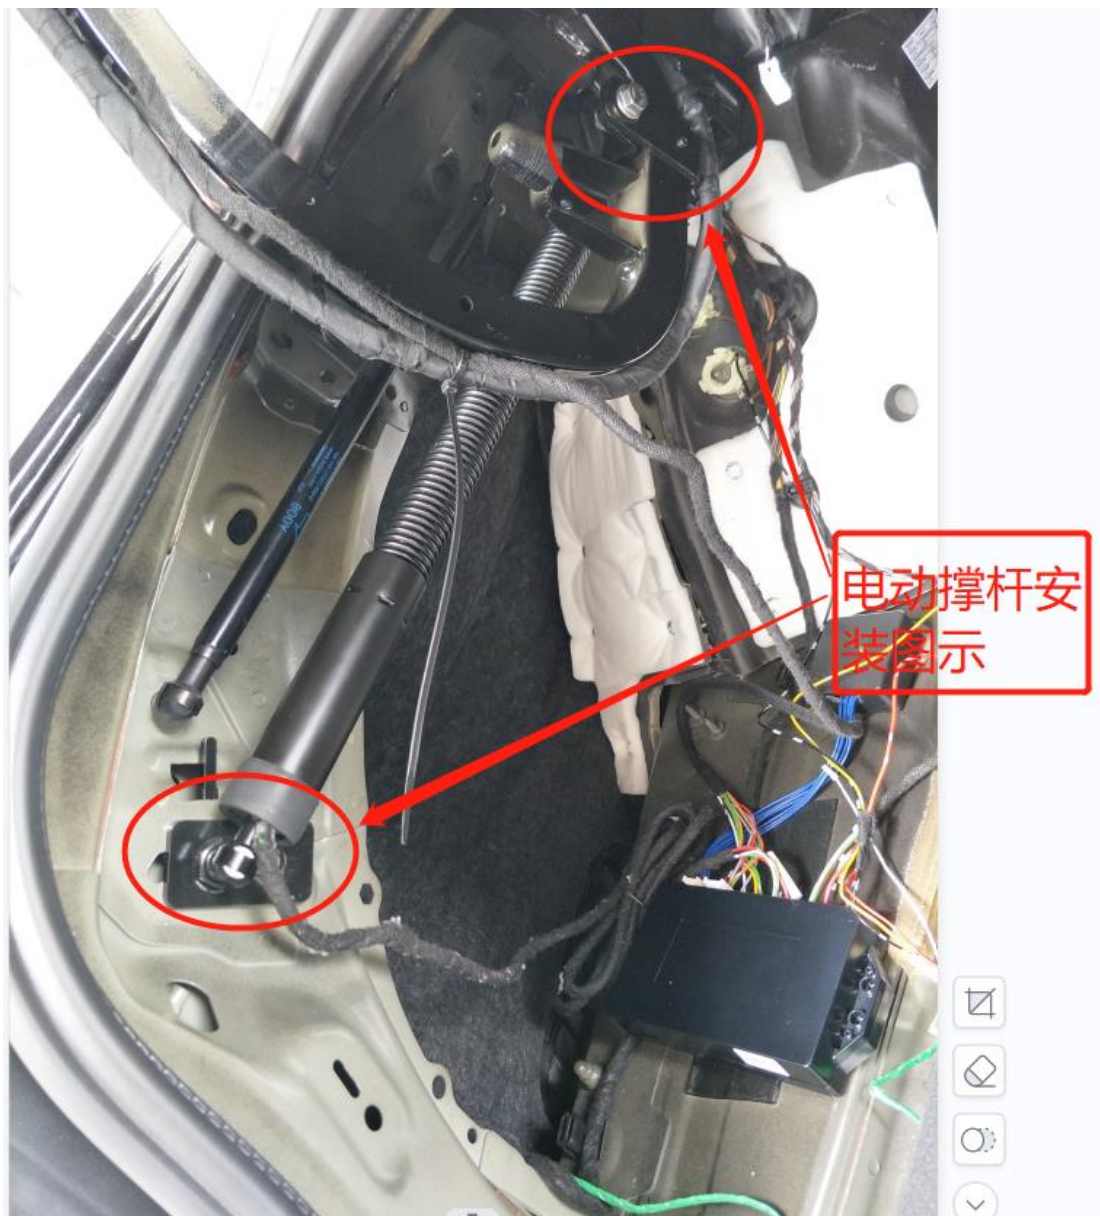

Then install right side holder.

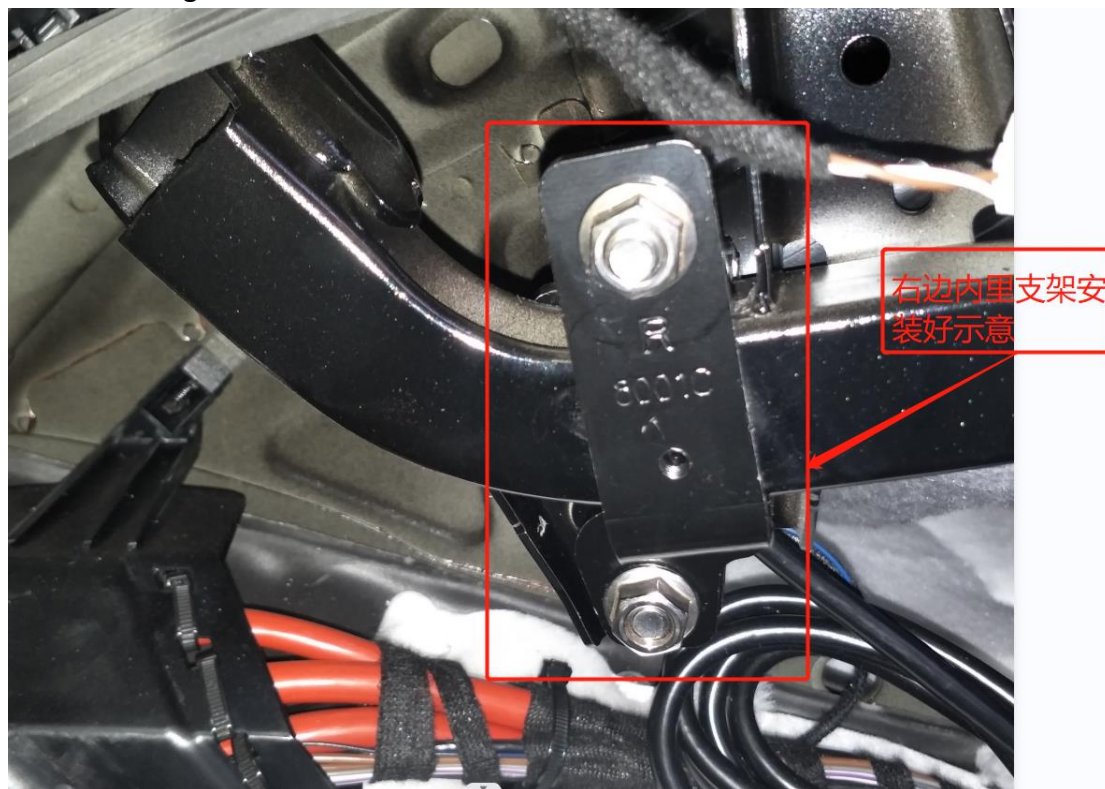

Install electric pole.

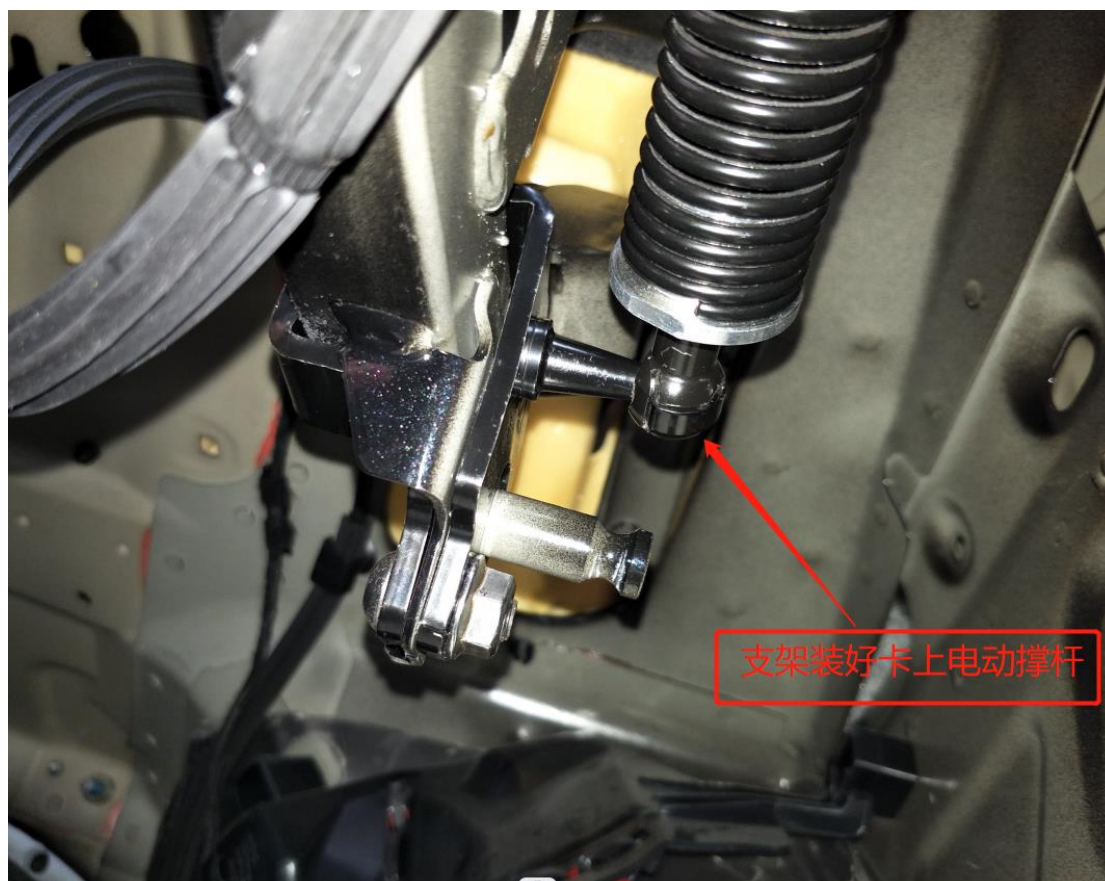

Install right electric pole like this photo.



Pole series sticker seventh-bottom, "L" means left pole, "R" means right pole.



Unplug original lock connector, connect with our special connector. Take off original lock and emergency switch, connect this emergency cable to our new lock.



Compare original lock with our suction lock.



Please note install this emergency cable firstly, then install our whole suction lock.





Here are special position for original emergency cable.






Emergency cable at bottom of rear seat.




Install suction lock and fix it, connect original connectors to our special connectors.

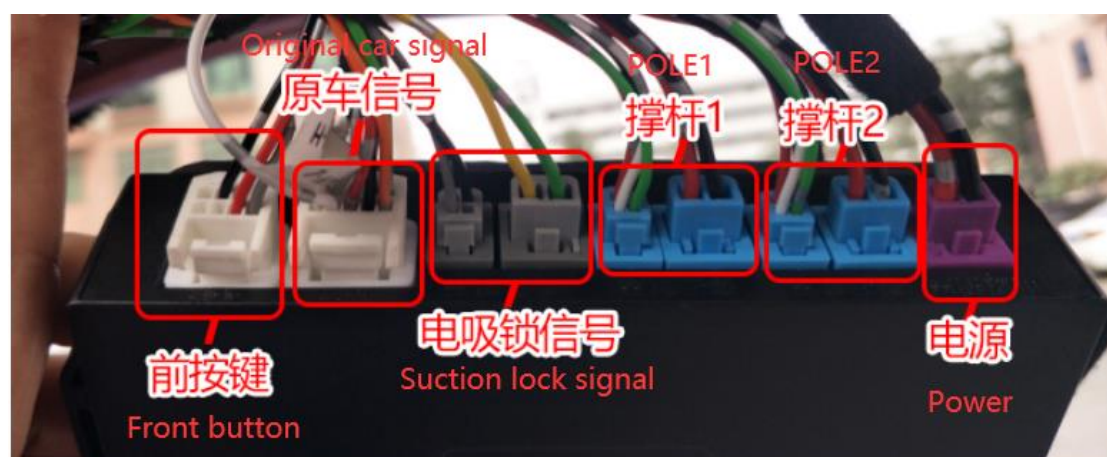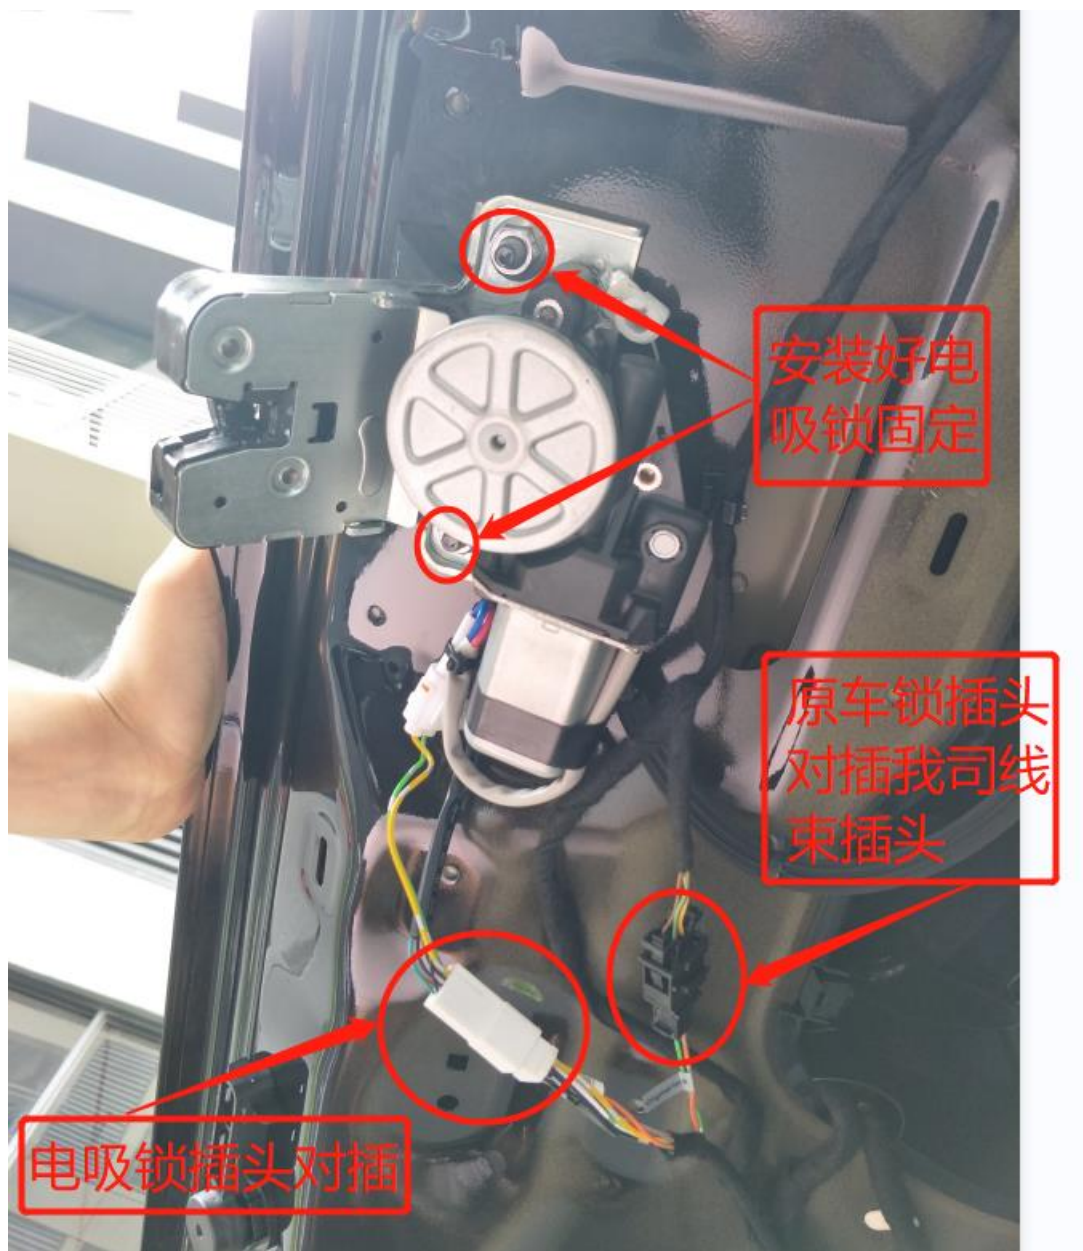

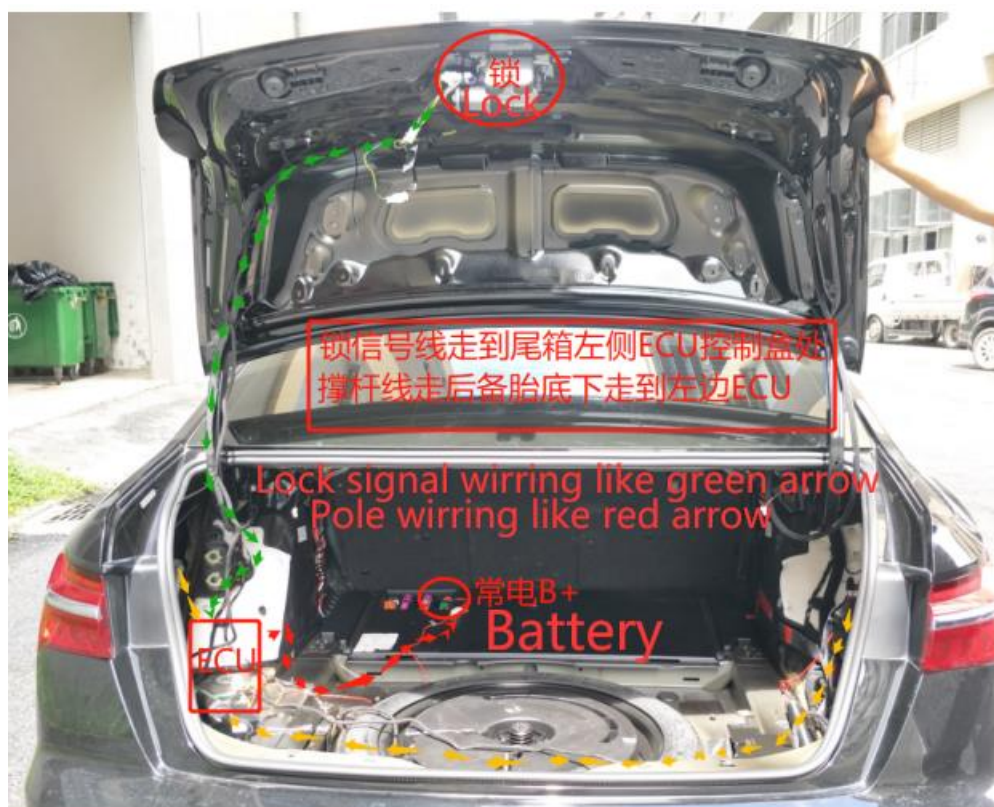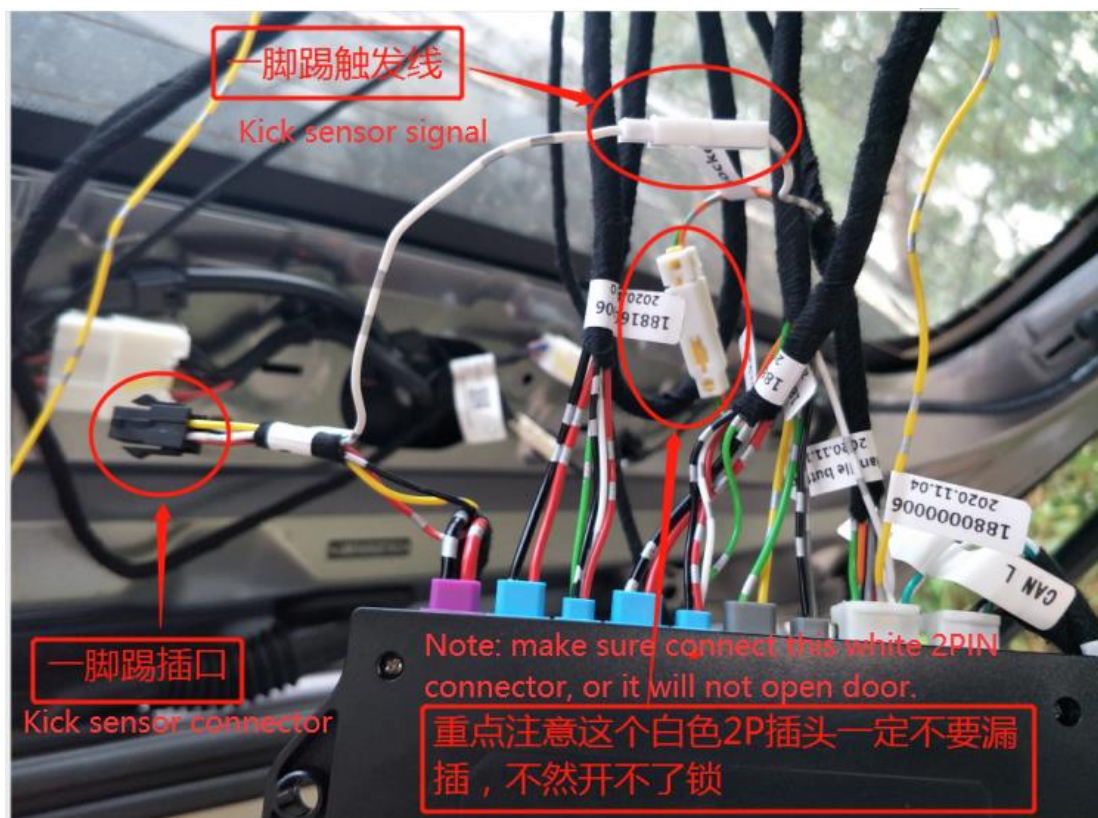

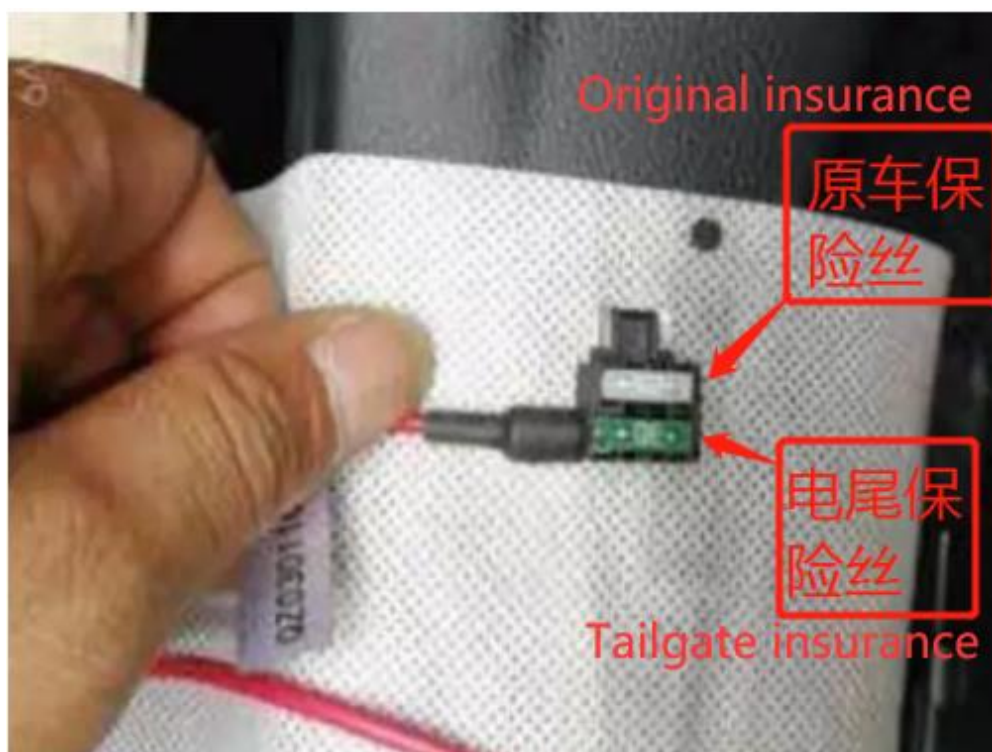

Battery power supply from here, please note direction.

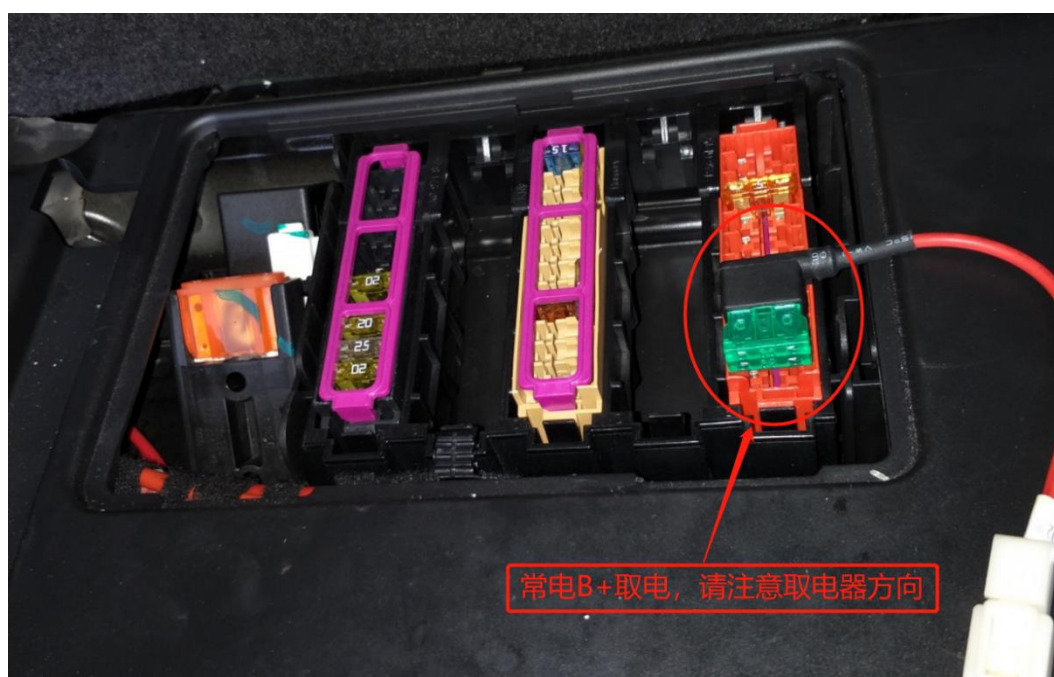

GND position.



地线桩位置

Make a hole for rear button.



Install rear button.



Press 2 times rear button to control tailgate.



After installation, power on and close the tail door manually, test the product to check whether the pole is pressed, the ball head gasket can be fine-tuned, you can use our development center magic sticker and tie to fix control box and wiring, install each parts as where they are, the installation is complete!